

How To Measure Sloping Doors

Sloping Doors - Easier To Order Than You Might Think

For the purpose of obtaining a quotation, all we need to know about sloping door is the maximum height, the maximum width and if there are going to be any glass panels fitted into the door.

We don't need to know about angles, how many slopes or how the slope works at this stage, just the maximum height and width.


We have a section of our quote form specifically for sloping doors - so you can enter your sizes online.

Sloping Door Order Form

Once you once you have placed your order with Kitchen Door Workshop and we will send you a sloping door order form which will tell you the other measurements that we need.

Sloping Door Order Form

Ordered By:
 Order Ref:
 Door Colour:
 Door Style:





Doors with a height of 1700mm or above will be supplied with a mid rail*. If you require a mid rail on a door with a height less than 1700mm, tick the 'Mid Rail Req' box.

* Mid rails not included on Trends - Lewes, Newick, Brighton, Ringmer, Petworth or Durrington door styles, or Bella - Adford, Euroline, Knebworth, Lincoln, Pisa, Rimini, Roma or Venice styles.

Doors with a mid rail will have it supplied at 655mm from the bottom edge to its centre as standard, unless specified otherwise in the box below.

Mid Rail Position: mm

	Quantity	Height	Width	Mid Rail Req	RAH		Drilled From Top	Drilled From Bottom	Qty Left	Qty Right
										

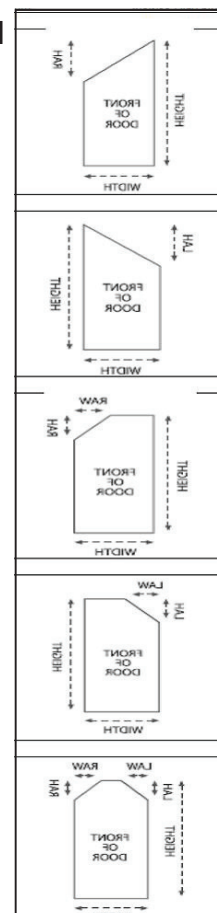

No Need To Worry About Angles!

Obtaining a sloping door is very straight forward, you don't need to worry about calculating angles, you don't need to send us any CAD drawings or anything like that, we will tell you what we need to know. Our suppliers will calculate the angles and work it how the door will be manufactured for you. All we need you to do is just complete the relevant boxes on the form with the various dimensions and we'll work out everything else for you.

Sloping Door Order Form

Ordered By:
 Order Ref:
 Door Colour:
 Door Style:



Doors with a height of 1700mm or above will be supplied with a mid rail*. If you require a mid rail on a door with a height less than 1700mm, tick the 'Mid Rail Req' box.

* Mid rails not included on Trends - Lewes, Newick, Brighton, Ringmer, Petworth or Durrington door styles, or Bella - Ashford, Euroline, Knebworth, Lincoln, Pisa, Rimini, Roma or Venice styles.

Doors with a mid rail will have it supplied at 655mm from the bottom edge to its centre as standard, unless specified otherwise in the box below.

Mid Rail Position: mm

	Quantity	Height	Width	Mid Rail Req	RAH			Drilled From Top	Drilled From Bottom	Qty Left	Qty Right

	Quantity	Height	Width	Mid Rail Req			LAH			Drilled From Top	Drilled From Bottom	Qty Left	Qty Right

	Quantity	Height	Width	Mid Rail Req	RAH	RAW			Drilled From Top	Drilled From Bottom	Qty Left	Qty Right

	Quantity	Height	Width	Mid Rail Req			LAH	LAW	Drilled From Top	Drilled From Bottom	Qty Left	Qty Right

	Quantity	Height	Width	Mid Rail Req	RAH	RAW	LAH	LAW	Drilled From Top	Drilled From Bottom	Qty Left	Qty Right

When carrying out any DIY project, safety should always be your first priority and care should be always be taken to use tools safely and to wear protective clothing, glasses and ear protection where required.

This book is copyright an may not be distributed, or re produced without the written consent of the author.

Although the author and publisher have made every effort to ensure that the information in this book was correct at press time, the author and publisher do not assume and hereby disclaim any liability to any party for any loss, damage, or disruption caused by errors or omissions, whether such errors or omissions result from negligence, accident, or any other cause



www.KitchenDoorWorkshop.co.uk

Open until
9pm weekdays and 5pm Saturdays

Kitchen Door Workshop Limited

Millers Yard, Straight Half Mile, Maresfield, East Sussex, TN22 3AY

0845 643 1928 or 01825 765041 sales@KitchenDoorWorkshop.com